


3.2x2.5 SMD TCXO

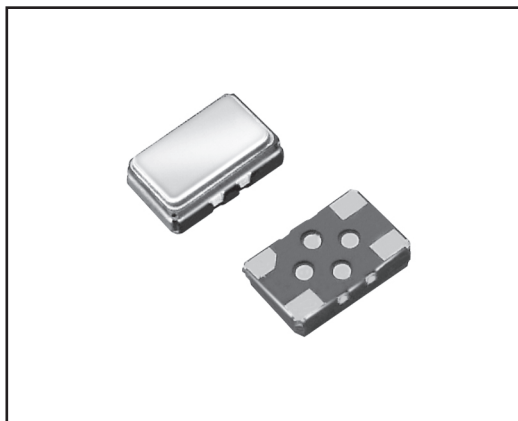

Part Number Guide

T (Type 型号): T3=3.2x2.5 SMD TCXO

V (Input Voltage 输入电压): 3=3.3V 5=5.0V, etc

F (Frequency 标称频率)

OT (Operating Temperature 工作温度): 0070= 0°C to +70°C 3080= -30°C to +80°C, etc

TR (Tape and Reel 编带)

S (Special Requirement 特殊要求)

Electrical Specifications 电气参数

型号	Holder Type	3.2x2.5 SMD TCXO
频率范围	Frequency Range	13.000 Mhz/19.200 Mhz/19.680 Mhz/26.000 Mhz
电压	Supply Voltage	5.0V or 3.3V ±10%
工作温度范围	Operating Temperature Range	-10°C - +60°C to -40°C - +85°C
保存温度范围	Storage Temperature Range	-40°C to +85°C
负载	Output Load	(10K // 10 PF) +10%
频率偏差	Frequency Deviation	2.0ppm Max
频率稳定度	Frequency Stability	±2.5ppm Max
老化	Aging	±1ppm Max./year
消耗电流	Current Consumption	20mA Max
相位噪声	Phase Noise	
	100Hz offset typical	-115dB/Hz
	1KHz offset typical	-135dB/Hz
	10KHz offset typical	-148dB/Hz

Mechanical Dimensions 外型尺寸

